

Mounting instructions for Moto-Master brake rotors:

113076 – 113077 – 113080 – 113081 – 113099 – 113100 – 113110 – 113135 – 113161 – 113274 – 113275 – 113276 – 113277 – 113278 – 113279 -117013 – 117014 – 117015 – 117016 – 117026 – 117042 - 117058

Thank you for purchasing this Moto-Master performance product. Please read carefully before installation. Always use NEW BRAKE PADS when mounting a new disc. Make sure the wheel hub contact surface is free of dirt or paint and use new disc mounting bolts if necessary. Replace your brake fluid frequently and make sure your brake system is bled correctly. The thickness of the Moto-Master rotor may vary from the original disc; this difference is not of any importance for your brake function. Center the rotor on the clean hub and mount the bolts according to OEM torque specs.

Step 1

Remove original discs and ABS-ring* from hub.

Step 2

Clean disc contact surfaces very carefully. Make sure contact surfaces are free of dirt and thread lock residue.

>>



Step 3

Place the ABS-ring* in original position and add Moto-Master spacer rings.


>>



Step 4

Add Moto-Master Floating Brake Discs and fix with original bolts. Use new bolts if necessary. Tighten bolts according to OEM torque specifications. Use thread lock to secure bolts when specified in the manual of the bike.

>>

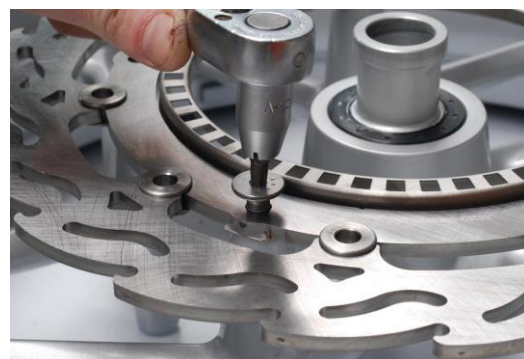

**applies only when bike is ABS equipped*

Consult a certified dealer or professional mechanic if you are not fully qualified in motorcycle maintenance. Moto-Master cannot be held responsible for any damage or injury caused by incorrect product mounting, disregarding specifications and these instructions, or product mounting by an unqualified third party. For latest updated product information please consult www.moto-master.com.

